


分瓣正角环

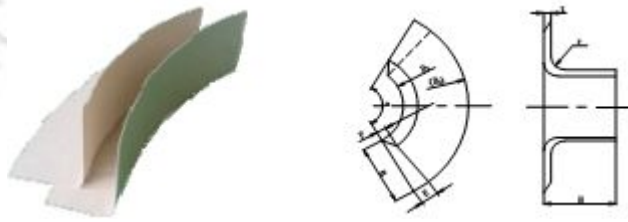

适用于线圈上下端边缘部分的绝缘与等电位面平行放置，可以增大线圈的爬电距离。

制作范围和公差：

W	H	r		t			
<200	<200	≤40	>40	1.0	1.5	2.0	3.0
±2	±2	±3	±5	0 +0.2	0 +0.4	0 +0.4	0 +0.6

模具分档情况：

模具中心直径	使用直径范围 (常规))	使用直径范围 (特殊)	分瓣数	H	W	T	R
400		375-425	4	≤200	≤200	1.0 1.5 2.0 3.0	20
450	401-500	425-475	5				10, 20
500		475-525	6				20
550	501-600	525-575	6				10, 20
600		575-625	7				20
700		675-725	7				10, 20
750	701-800	725-775	7				10, 15, 20, 50
800		775-825	7				10
850	801-900	825-875	8				10, 15, 20, 30, 40
900		875-925	8				5, 10, 20
950	901-1000	925-975	8				10, 15, 20, 30, 50
1000		975-1025	8				10
1050	1001-1100	1025-1075	9				10, 15, 20, 30, 40, 50
1150	1101-1200	1125-1175	9				10, 15, 20, 25, 30, 40, 50
1200		1175-1225	9				10, 15
1300	1201-1400	1250-1350	10				10, 15, 20, 30, 40, 50
1400		1350-1450	10				5, 10
1500	1401-1600	1450-1550	11				10, 15, 20, 30, 40, 50
1600		1550-1650	12				15, 20
1700	1601-1800	1650-1750	12				10, 20, 30, 40
1800		1750-1850	13				5
1900	1801-2000	1850-1950	13				10, 20, 30
2000		1950-2050	14				25
2100	2001-2200	2050-2150	14				10, 20, 30
2200		2150-2250	14	10, 20			
2300	2201-2400	2250-2350	15	20, 30, 40			
2400		2350-2450	16	5, 10			